

Product Name	Apogee™ Counter-top Single Burner (Hob) Cooktop	Quantity		Item #	
--------------	---	----------	--	--------	--



Faceplate shown in Temperature mode

Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



**Standard Features**

- Portable counter-top design with stainless steel housing, heavy duty electronic components, and high impact glass-ceramic top designed for use in the commercial kitchen
- Built in cooking timer
- Temperature control allows for 100 power cook and temperature settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and correct minor problems
- LCD display panel and capacitive touch for precise user feedback and operation
- Automatic pan detection allows for instant energy transmission to the pan and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle to ensure cleaner and cooler air intake
- Sloped front panel allows for easy viewing and operation
- Easy to clean front surface and glass-ceramic top
- Integral fan keeps internal electronics cool
- Lock feature prevents unwanted setting changes

- Available in 1800 watts (100-120VAC), 2500, 3000 and 3500 watts (200-240VAC).
- Three year limited warranty in US and Canada only - see statement for details.
- Made in the USA\*

**Specifications**

Shall be a CookTek counter-top induction cooktop, model \_\_\_\_\_ with a total kW rating of \_\_\_\_\_.

Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact glass-ceramic top.


Unit shall be equipped with a built in temperature control with 100 precise power and temperature settings, auto shut-off to prevent overheating, self-diagnostics, and a pan maximier feature that ensures maximum heating of any induction compatible pan.

Unit shall have LCD display panel and capacitive touch for precise user feedback.

Unit shall operate on \_\_\_\_\_ power with integral \_\_\_\_\_ cord and plug (supplied).

\*of USA and imported parts

APOGEE™ COUNTER-TOP SINGLE  
BURNER (HOB) COOKTOP

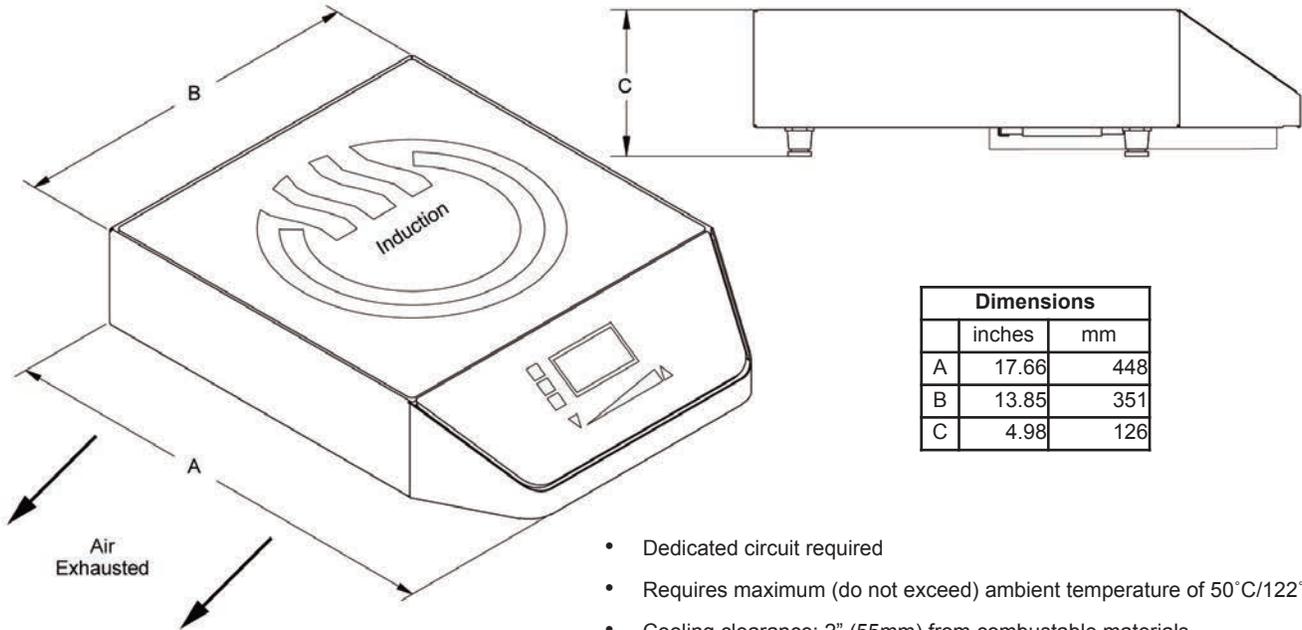

Dimensions		
	inches	mm
A	17.66	448
B	13.85	351
C	4.98	126

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) from combustable materials



### Specifications

Model Number	MC1800G	MC2500G	MC3000G	MC3500G
Power Requirements	100-120VAC, 1Ph	200-240VAC, 1 Ph	200-240VAC, 1 Ph	200-240VAC, 1 Ph
Power Consumption	1800W (max)	2500W (max)	3000W (max)	3500W (max)
BTU Comparison	16,000 BTU	22,000 BTU	26,000 BTU	31,000 BTU
Voltage	100-120VAC, 50/60 Hz	200-240VAC, 50/60 Hz	200-240VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	15A (max)	12A (max)	14A (max)	17A (max)
Power Range	100-1800W	100-2500W	100-3000W	10-3500W
Temperature Range	85-500°F / 30-260°C	85-500°F / 30-260°C	85-500°F / 30-260°C	85-500°F / 30-260°C
Dimensions (in)	17.66" x 13.85" x 4.98"	17.66" x 13.85" x 4.98"	17.66" x 13.85" x 4.98"	17.66" x 13.85" x 4.98"
Dimensions (mm)	448 x 351 x 126	448 x 351 x 126	448 x 351 x 126	448 x 351 x 126
Weight	17.75 lbs / 8.1 kg	17.75 lbs / 8.1 kg	17.75 lbs / 8.1 kg	17.75 lbs / 8.1 kg
Packaged Weight	23 lbs / 10.4	23 lbs / 10.4	23 lbs / 10.4	23 lbs / 10.4
Packaged Dimensions (in)	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"
Packaged Dims. (mm)	527 x 476 x 229	527 x 476 x 229	527 x 476 x 229	527 x 476 x 229
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 6-20Pin US/Canada, country specific elsewhere		
Warranty	36 months limited parts and labor in US and Canada only - see statement for details			

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

**CookTek Induction Systems, LLC**  
156 N. Jefferson St. Ste 300  
Chicago, IL 60661-1436, USA  
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220  
Toll Free: 1.888.COOKTEK (266.5835)  
Toll Free Fax: 1.888.COOKFAX (266.5329)